




# PRY-CAM

---

## HARVESTER

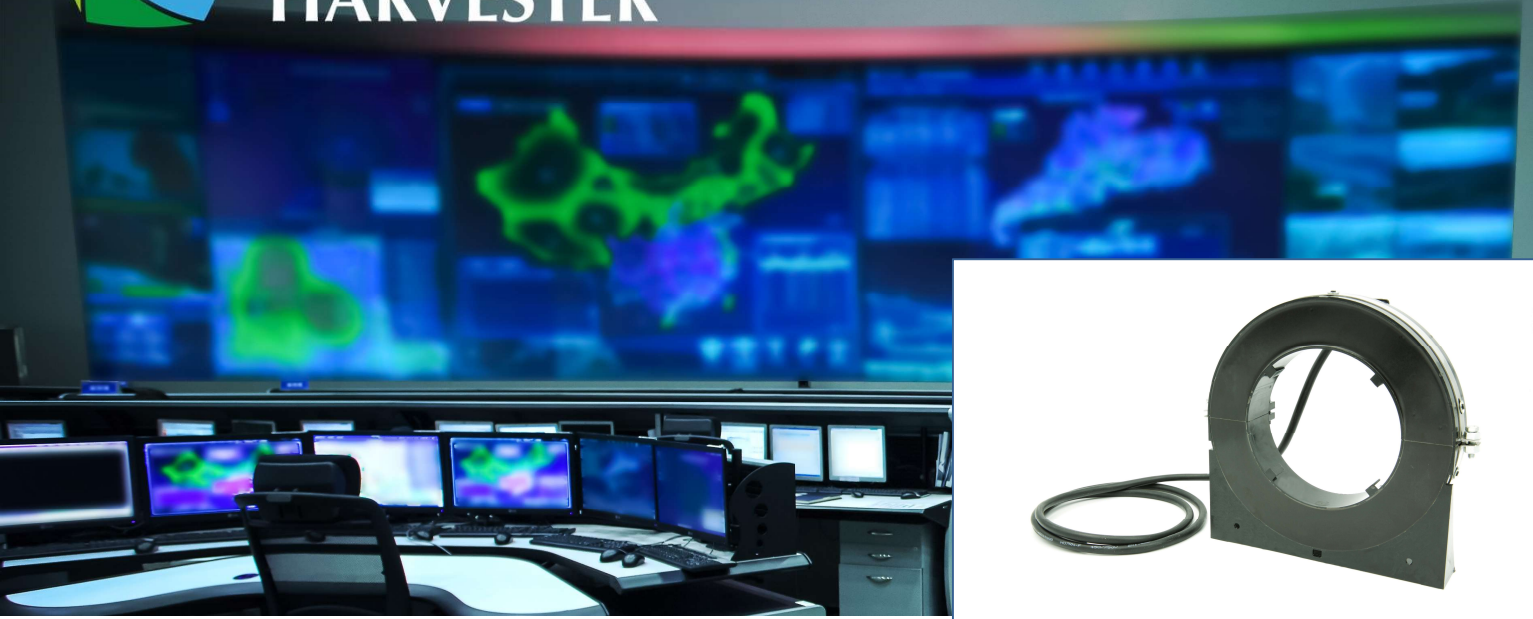

**PRY-CAM HARVESTER** is a device used to acquire power supply from the AC cable system and feed power to the monitoring system when a power connection is not available on site.

### KEY FEATURES

- Autonomous power supply to monitoring system
- Current transformer paired with electronic converter
- Two-piece split assembly
- Waterproof case available on demand

### WHY IT IS GOOD FOR YOUR BUSINESS

- Sourcing of power supply directly from the AC cable being monitored, when no other power supply is available on site
- No batteries on site, no maintenance required
- No additional civil works required



**PRY-CAM**

A Brand of Prysmian Group


For data-driven  
power



# PRY-CAM

---

## HARVESTER

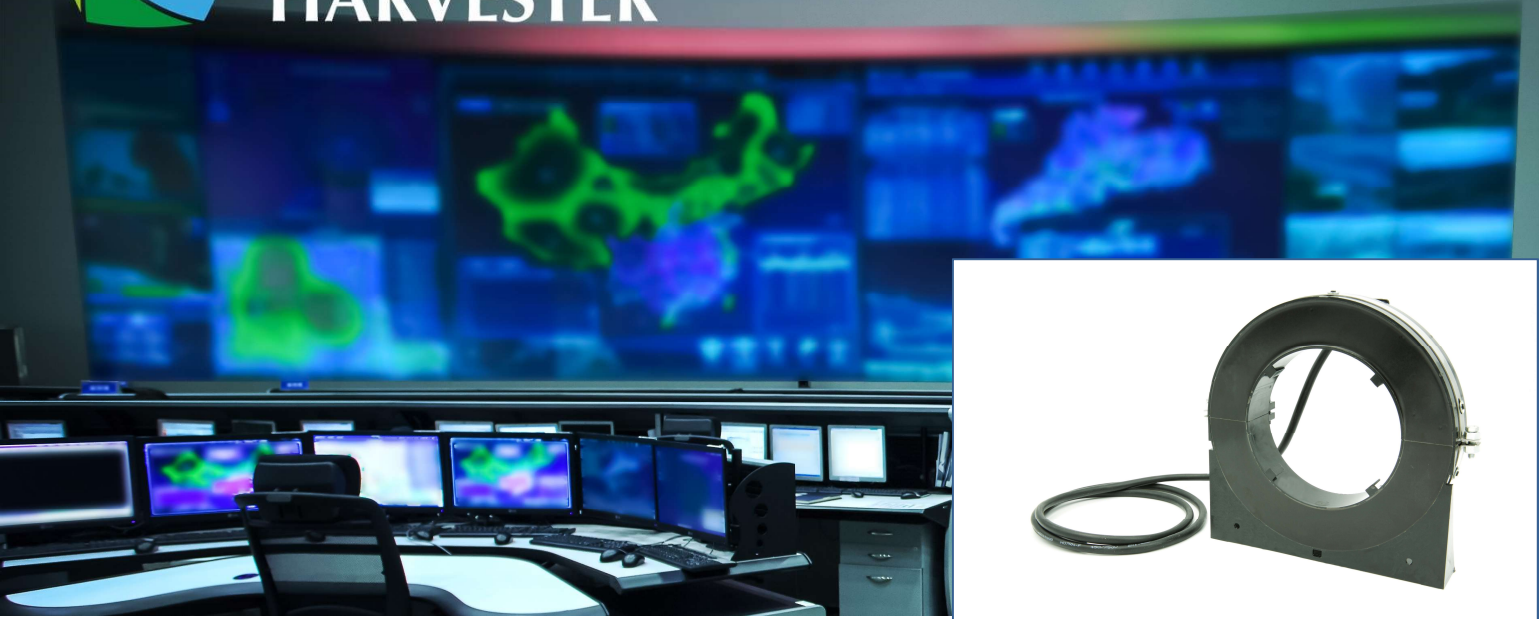

### PRY-CAM HARVESTER TECHNICAL SPECIFICATIONS

PRY-CAM HARVESTER consists of a current transformer + AC/DC electronic converter (EHEU – Energy Harvester Electronic Unit)

#### Energy Harvester Electronic Unit

|                                   |  |
|-----------------------------------|--|
| <b>Minimum switch-on current:</b> | 120 A (5 W output)<br>220 A (10 W output)<br>400 A (18 W output) |
| <b>Max primary current:</b>       | 2000 A   |
| <b>Max output power:</b>          | 18 W (1.3 A at 13.8 V DC)  |
| <b>Input Type:</b>                | Sinewave 50 Hz   |

#### Current Transformer

|                           |                     |
|---------------------------|---------------------|
| <b>L x W x H:</b>         | 275 x 259 x x 75 mm |
| <b>Internal diameter:</b> | 150 mm              |

Waterproof case available on demand



**PRY-CAM**

A Brand of Prysmian Group

For data-driven  
power