


FTTH Outdoor standard Flextube® Duct Cable,

Cable Design up to 288 fibres

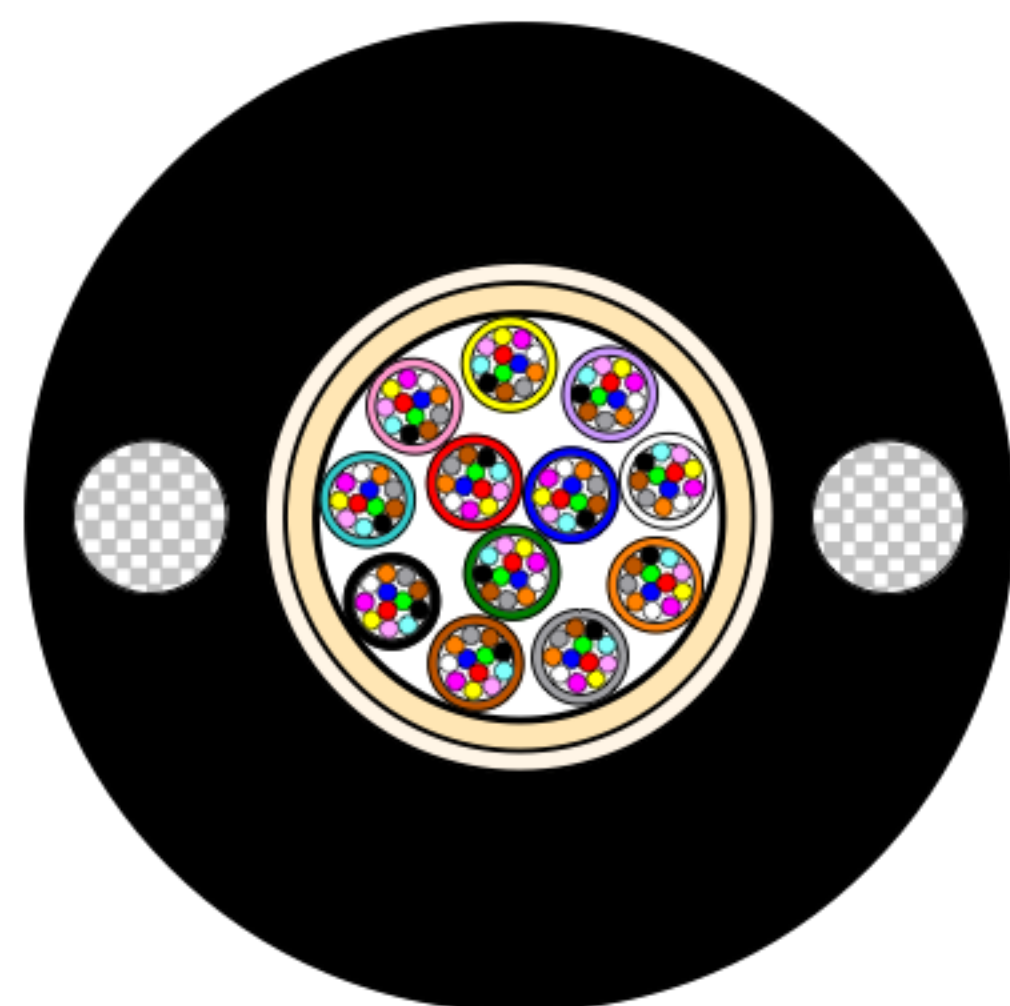

- not to scale -

- Flextube® housing the fibres
- Water tightness with dry elements
- Dielectric reinforcement
- Radial dielectric strength members
- PE Outer sheath. Black.

Features and advantages

Installation in duct.

The Flextube® design provides easier storage & faster installation.
Finger access to the fibres : no specific tools to open the Flextube.


Static cable bending radius 10 x cable diameter

Temperature range -30°C to +60°C

Technical data

No. of Fibres (x12)	≤	72	144	288
Cable Diameter	mm	11.3	13.4	15.8
Cable weight	kg/km	95	135	190

Cable Design from 432 fibres

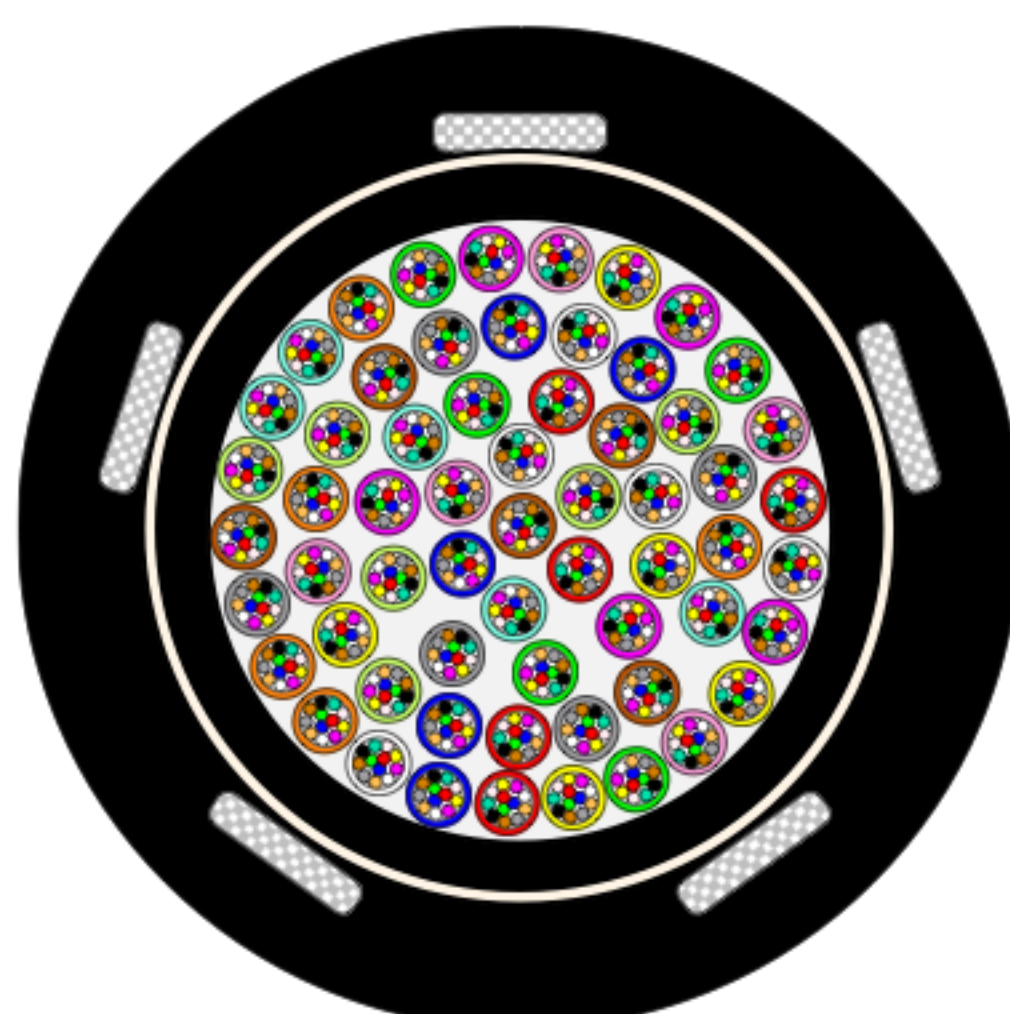

- not to scale -

- Flextube® housing the fibres
- Water tightness with dry elements
- Inner jacket
- Radial dielectric strength members
- PE Outer sheath. Black.

Features and advantages

Installation in duct.

The Flextube® design provides easier storage & faster installation.
Finger access to the fibres : no specific tools to open the Flextube.

Static cable bending radius 15 x cable diameter

Temperature range -30°C to +60°C

Technical data

No. of Fibres (x12)	≤	432	576	720	864
Cable Diameter	mm	18.2	19.7	21	22.2
Cable weight	kg/km	270	310	345	380

International Standards : IEC 60794; IEC 60793; ITU-T Rec. G.650; ITU-T; ITU-T Rec. G.652