


FTTH Outdoor mini Flextube® Duct Cable,

Cable Design

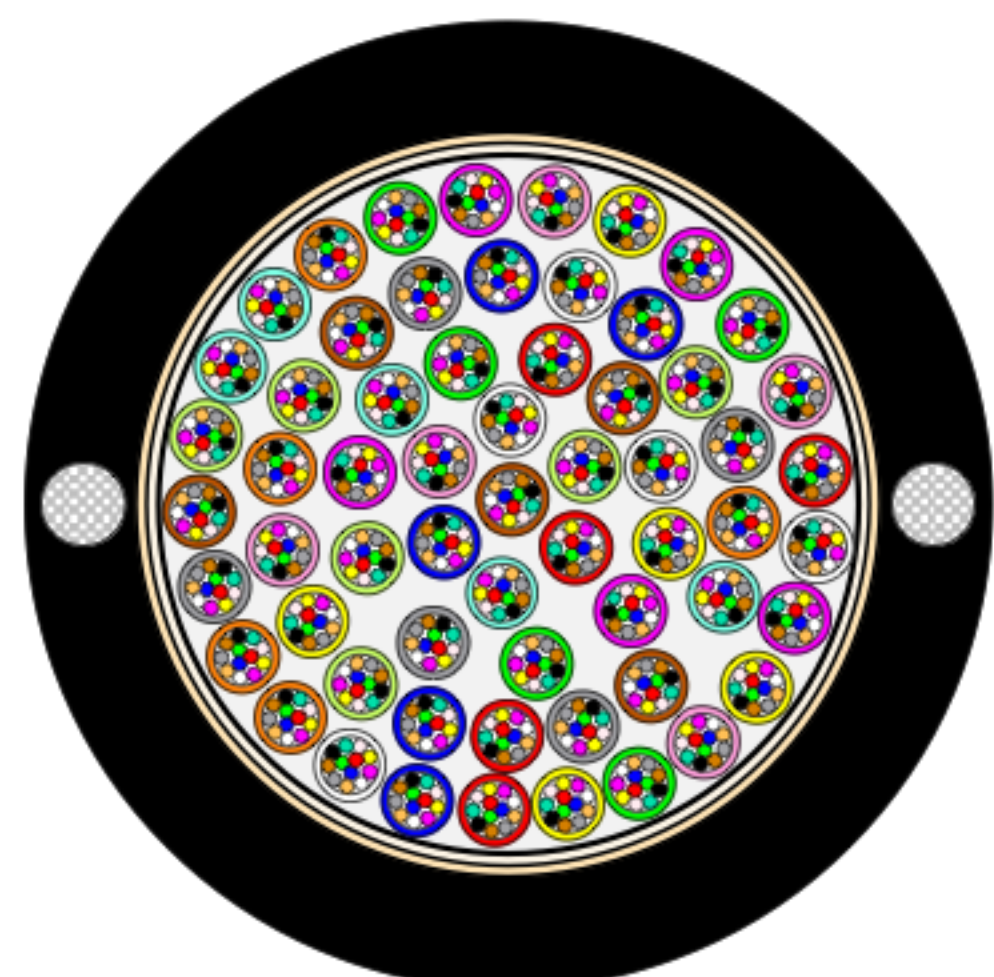

- not to scale -

- Flextube® housing the fibres
- Water tightness with dry elements
- Dielectric reinforcement
- Radial dielectric strength members
- PE Outer sheath. Black.

Features and advantages

Installation in duct.

when ordered as option, BendBright-XS fibre provides the lowest attenuation at 1625nm after installation and splicing with miniaturized equipments.

The Flextube® design provides easier storage & faster installation.

Finger access to the fibres : no specific tools to open the Flextube.

Static cable bending radius 10 x cable diameter

Temperature range -30°C to +60°C

Technical data

No. of Fibres (x12)	≤	12	48	72	144	288	432	576	720	864
Cable Diameter	mm	6	8	10	11.5	14	15.2	16.7	18	19.2
Cable weight	kg/km	30	50	70	90	140	160	190	220	250

International Standards : IEC 60794; IEC 60793; ITU-T Rec. G.650; ITU-T Rec. G.657; ITU-T Rec. G.652