


# ICS PB PA FC 1x2xAWG18/7 SWB PVC

## PROFIBUS PA FC FLEX Steel Wire Braid Armoured PVC Cable

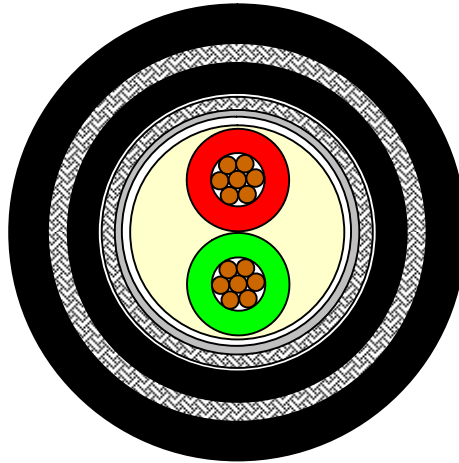

### Application

Spur and trunk cable for flexible installation indoor and outdoor on racks in conduits, FastConnect-Assembly

- UV-resistant
- Silikon free
- Oil and grease resistant

### Standards

IEC 61158 and IEC 61784  
Cable type A acc. to Profibus PA

### Flame Resistance

IEC 60332-1-2

### Construction

Conductor	stranded bare copper wires, 7x0.40 $\varnothing$ 1.2 mm, (cross-section AWG18/7)
Insulation	foam-skin-PE, $\varnothing$ 2.55 mm
Stranding	two cores gn / rd to the Pair
Bedding	PVC, filling the interstices
Static screen	PET-Al-Foil longitudinally applied
Braid	tinned copper braid, coverage approx. 70%
Sheath	PVC, $\varnothing$ 8.0 mm
Colour	black or blue
Armouring	galvanized steel wire braid, optical coverage 85% $\varnothing$ 9.3 mm
Outer sheath	PVC, $\varnothing$ 12.0 mm
Colour	black or blue
Marking	DRAKA ICS PB PA FC 1x2xAWG18/7 SWB PVC, batch number and meter marking

# ICS PB PA FC 1x2xAWG18/7 SWB PVC

## Mechanical properties

Bending radius	single bending repeated bending	≥ 60 mm ≥ 120 mm
Temperature range	Transport and storage Installation	- 40°C to + 70°C - 40°C to + 70°C - 5°C to + 50°C

## Electrical properties

at 20°C

Loop resistance	≤ 43.6 Ω/km
Screen resistance nominal	12 Ω/km
Characteristic impedance (at 31.25 kHz)	100 Ω ± 20 Ω
Mutual capacitance (at 1 kHz)	approx. 60 nF/km
Capacitance unbalance to earth max.	2 nF/km
Insulation resistance	≥ 5 GΩkm
Test Voltage (DC, 1 min) Core/Core and Core/Screen	1 kV
Operating voltage (RMS)	≤ 100 V
Inductance (nominal)	0.70 mH/km

## Electrical data

at 20°C

Frequency (kHz)	Impedance (Ohm)	Attenuation (dB/100m)	Propagation delay change (µs/km)
7.9-39 31.25 39	100 ± 20	≤ 0.3	≤ 1.7

## Technical data

Part number	Cable type DIN/VDE	Type	Product name	Outer diameter mm	Weight kg	Standard delivery length m	Drum size (mm) PWD*	Gross weight kg	Copper content	Tensile force N
1025049	Li-02YSY(ST)CYQY	1 x 2 x 1.2/2.55-100	ICS PB PA FC 1x2xAWG18/7 SWB PVC	12.0	211	1000	770x360x560	225	36	500

\*PWD (Plywood Drum)

[PRODUCT CODE TABLE]

**ICS PB PA FC 1x2xAWG18/7 SWB PVC**

---

© PRYSMIAN GROUP 2011, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.