


ICS PB PA FC 1x2xAWG18/1 GST PVC

PROFIBUS PA FC Galvanized Steel Tape Armoured PVC Installation Cable

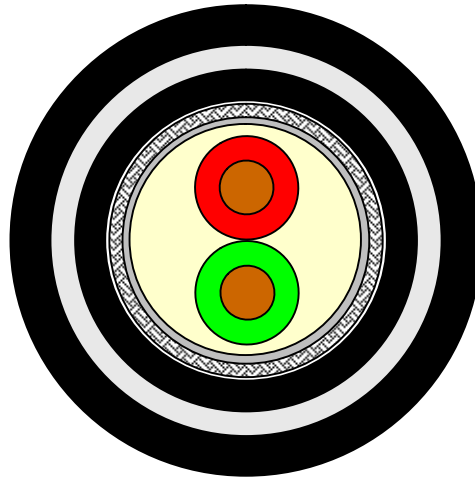

Application

Spur and trunk cable for fixed installation indoor and outdoor on racks in conduits, FastConnect-Assembly

- UV-resistant
- Silikon free
- Oil and grease resistant

Standards

IEC 61158 and IEC 61784
Cable type A acc. to Profibus PA

Flame Resistance

IEC 60332-1-2

Construction

Conductor	bare copper wire, \varnothing 1.05 mm, (cross-section AWG18)
Insulation	foam-skin-PE, \varnothing 2.55 mm
Stranding	two cores gn / rd to the Pair
Bedding	PVC, filling the interstices
Static screen	PET-Al-Foil longitudinally applied
Braid	tinned copper Braid Coverage approx. 70%
Sheath	PVC, \varnothing 8.0 mm
Colour	black or blue
Wrapping	PP foil overlapping, \varnothing 8.2 mm
Armouring	2 galvanized steel tapes, thickness of tapes 0.10 mm, \varnothing 9.0 mm
Outer sheath	PVC, \varnothing 12.0 mm
Colour	black or blue
Marking	DRAKA ICS PB PA FC 1x2xAWG18/1 GST PVC, batch number and meter marking

ICS PB PA FC 1x2xAWG18/1 GST PVC

Mechanical properties

Bending radius	single bending repeated bending	≥ 120 mm ≥ 180 mm
Temperature range	Transport and storage Installation	- 40°C to + 70°C - 40°C to + 70°C - 5°C to + 50°C

Electrical properties

at 20°C

Loop resistance	≤ 46 Ω/km
Screen resistance nominal	12 Ω/km
Characteristic impedance (at 31.25 kHz)	100 Ω ± 20 Ω
Mutual capacitance (at 1 kHz)	approx. 60 nF/km
Capacitance unbalance to earth max.	2 nF/km
Insulation resistance	≥ 5 GΩkm
Test Voltage (DC, 1 min) Core/Core and Core/Screen	1 kV
Operating voltage (RMS)	≤ 100 V
Inductance (nominal)	0.70 mH/km

Electrical data

at 20°C

Frequency (kHz)	Impedance (Ohm)	Attenuation (dB/100m)	Propagation delay change (µs/km)
7.9-39 31.25 39	100 ± 20	≤ 0.3	≤ 1.7

Technical data

Part number	Cable type DIN/VDE	Type	Product name	Outer diameter mm	Weight kg	Standard delivery length m	Drum size (mm) OWD*	Gross weight kg	Copper content	Tensile force N
1025052	02YSY(ST)CYBY	1 x 2 x 1.05/2.55-100	ICS PB PA FC 1x2xAWG18/1 GST PVC	12.0	193	1000	900x450x560	233	35.3	175

*OWD (One Way Drum)

[PRODUCT CODE TABLE]

ICS PB PA FC 1x2xAWG18/1 GST PVC

© PRYSMIAN GROUP 2011, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.