


Steel Wire Armoured Central Tube Optical Cable

Cable Design

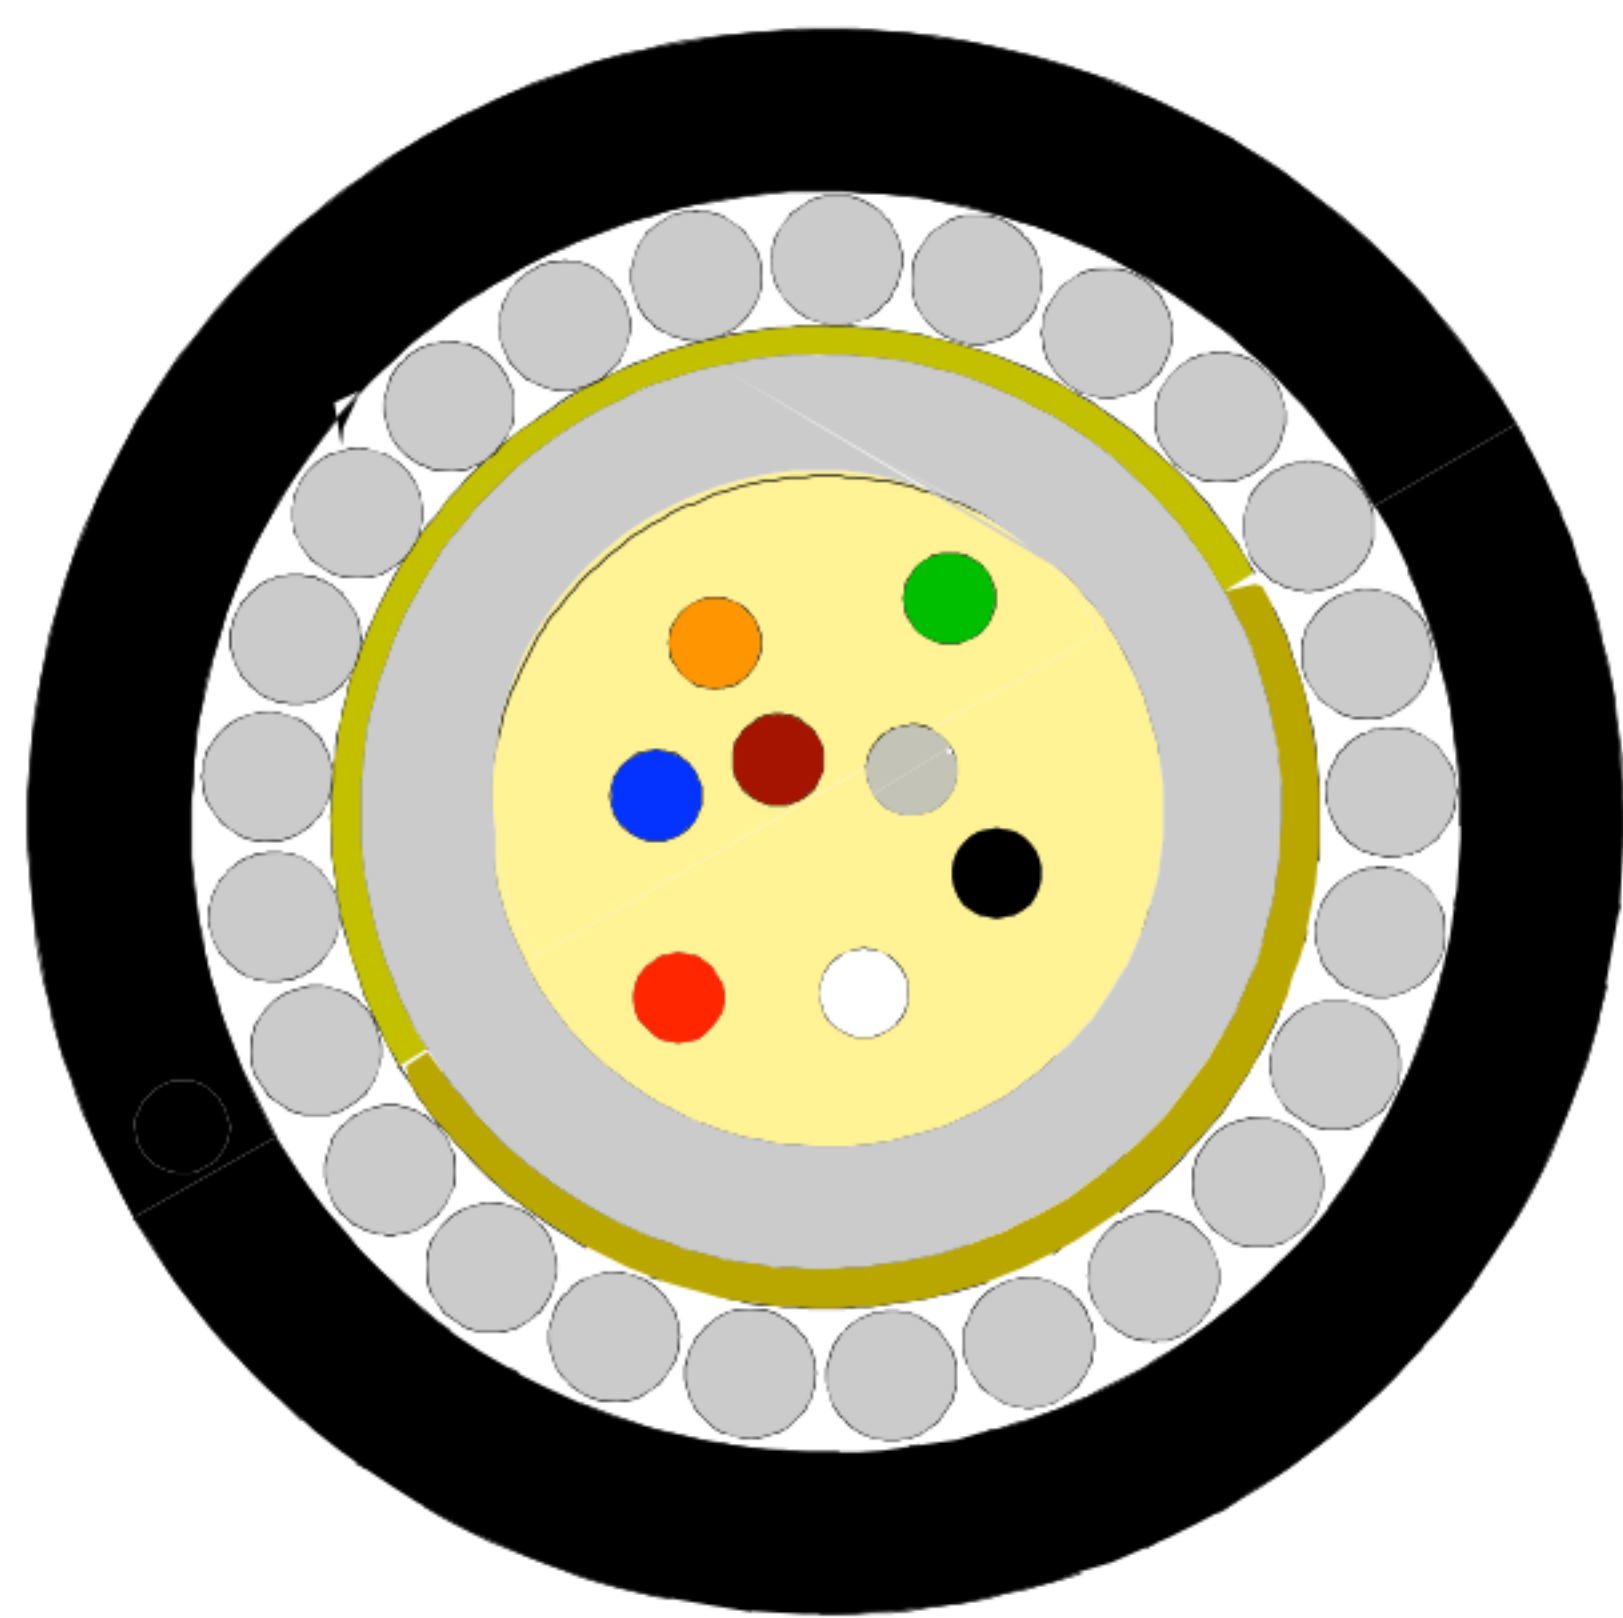

- not to scale -

- **Fibre Identification:** Every fibre in a tube is uniquely identified by a different colour.
- **Armour:** One layer of galvanized round steel wires
- **Outer Sheath:** PE / PVC / LSZH compounds

Features and advantages

The cable is designed for installation in areas where mechanical impact is expected.

Static cable bending radius 15 x cable diameter

Temperature range -30°C to +70°C

Technical data

No. of Fibres		4 - 24
Cable diameter	mm	10
Cable weight	Kg/km	165

International Standards : IEC 60794; IEC 60793; IEC-60332-1; ITU-T Rec. G.650; ITU-T Rec. G. 657; ITU-T Rec. G.652 ;ITU-T Rec G655 ; ITU-T Rec G651.

© PRYSMIAN 2012, All Rights Reserved
All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian: any modification or alteration afterwards of product may give different result.
The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed to be correct at the time of issue. Prysmian reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian.