

Wire Rope Accessories

Reeving splices

Part Number	Color Code	For Rope Size inches	Length inches	Rod Diameter inches	Max. Load lbs
RS-2103	Yellow	3/8	22	.051	300
RS-2105	Orange	1/2	29	.070	2000
RS-2107	Black	5/8	36	.086	2000



Reeving splices are provided three to a package. Use only once, then discard. Use ONLY for right lay ropes. Other sizes are available.

Cable bands

Part Number	Description	Standard Packaging
WR-CB-38	Cable bands for 3/8 in. rope	50
WR-CB-12	Cable bands for 1/2 in. rope	50
WR-CB-58	Cable bands for 5/8 in. rope	50



Wire rope clips - malleable iron

Part Number	Description
79-107	1/8 in. wire rope clip
79-114	3/16 in. wire rope clip
79-122	1/4 in. wire rope clip
79-123	3/8 in. wire rope clip
79-126	1/2 in. wire rope clip
79-127	5/8 in. wire rope clip



Selector / hoistway door relating cable - preformed, flexible, zinc-coated

Part Number	Size inches	Stranding	MBL lbs	Cable Weight lbs/kft
040219	1/16	7 x 7	480	7.5
040218	3/32	7 x 7	920	16
040215	1/8	7 x 19	2,000	29
040216	5/32	7 x 19	2,800	45
040220	3/16	7 x 19	4,200	65
040225	1/4	7 x 19	7,000	110



DO NOT use selector / hoistway door relating cable for hoisting applications.

Use these items to maintain wire rope. See item for location in this catalog.

#WR-RTS Rope Tensioning Systems - page 64 - 65

Load weighing devices - pages 66 - 67

#ACCULUBE 200 or 300 Acculube rope lubricator and cleaner - page 63

#WR-DRAKALUBE DrakaLube rope treatment - page 63


#MIS-100 or 101 Automatic rope oiler - page 63



Wire Rope Lubrication

Acculube™ automatic rope lubricator and cleaner kit

Part Number	Description
ACCULUBE 200	Automatic rope lubricator/cleaner kit, with three brushes (210 mm • 8.25 inch span), bracket and reservoirs filled with DrakaLube wire rope treatment
ACCULUBE 300	Automatic rope lubricator/cleaner kit, with three brushes (300 mm • 11.8 inch span), bracket and reservoirs filled with DrakaLube wire rope treatment
SLX125 DRAKALUBE	Replacement lubricator reservoir, filled with DrakaLube
2036	One (1) replacement 70 mm brush for Acculube 200
2037	One (1) replacement 100 mm brush for Acculube 300
98-02-87	One (1) steel mounting bracket
1015	One (1) reservoir attachment nipple

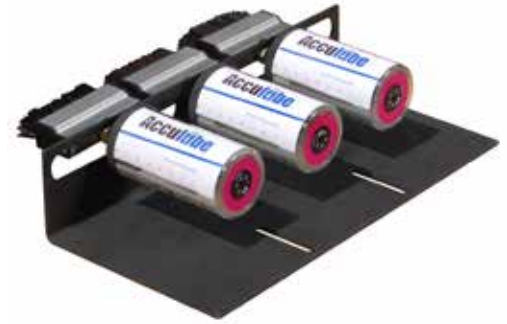

The Acculube automatic rope lubricator/cleaner is a set-and-forget way of efficiently lubricating traction ropes for up to a year.

The unit is quickly and easily assembled in the machine room. Simply install it so that the brushes are in contact with the ropes, set the lubricators to the proper time setting for your application (one year for standard indoor elevators, six months for exterior or high-contaminant environments) and walk away knowing that your hoist ropes are being consistently treated and cleaned as the elevator operates.

The lubricator reservoirs come pre-filled with our specially-formulated DrakaLube™ rope treatment. Please note that if your ropes are dirty, there will be greasy residue at the unit for a short while as the Acculube unit does its job.

Features

- Labor and time-saving way to keep ropes lubricated
- No oil spills or splashes in the machine room or the car
- Easy installation
- Constant, reliable lubricant application
- Ropes are continually cleaned by the brushes

DrakaLube™ wire rope treatment / lubricant


Part Number	Description
WR-DRAKALUBE	DrakaLube wire rope treatment / lubricant, one gallon jug

DrakaLube wire rope treatment / lubricant has been specifically formulated to fight bending stresses, high groove pressures and moisture. DrakaLube has additives that protect against corrosion, wear and most importantly, it can also displace moisture in the rope core.



Rope oilers for elevator hoist ropes, escalator chains and selector tapes

Part Number	Description
MIS-100	Automatic oiler, with 9" wick
MIS-102	Automatic oiler, with 12" wick
MIS-103	Extension bracket, for rope oiler
MIS-103A	Replacement wick, for all size rope oilers
MIS-103B	Replacement wick, 1/2" x 6 1/2" x 12"



The rope oiler lubricates by electrostatic attraction and requiring only minimal wick adjustment after installation.

Features

- Automatically lubricates rope for increased rope and sheave life
- Has an adjustable oiling rate-wick lock and wick length
- Features a top-fill external oil level indicator