


Blown Fibre Manifold

Prysmian Part Number: *XKTSC00257*

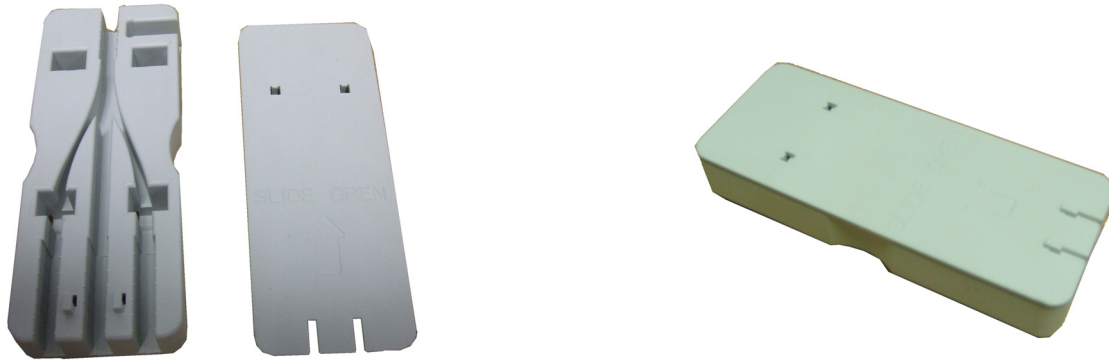

The Blown Fibre Manifold can be used on a variety of Prysmian rack mounted products including the SRS3000 sub-rack system and the PSP splice and patch shelf. The manifold provides the ability to enter onto a shelf with up to six blown fibre tubes. The manifold clips into place on the back of the shelves and is supplied with a cover to protect the fibres.

Features and Benefits

- Enables up to six blown fibre tubes to be installed onto a splice and patch shelf.
- Clips onto the back of the shelf without the need for screws or fasteners.
- Cover can be fitted to protect the fibres and tube inside the manifold.
- Manufactured from fire resistant UL94-V0 material.

Kit Contents

- 1 Blown Fibre Manifold and Cover

Technical Data

- Maximum tube capacity: 6 x 5mm tubes
- Operating temperature: -20°C to + 50°C (5 to 95% RH)
- Material:- FR HIPS
- Finish:- RAL7035

Logistics

- Packing Dimensions (mm): (w) 40 x (d) 100 x (h) 15
- Packed Weight (kg): 0.5
- Net weight (kg): 0.3

Prysmian Telecom Cables & Systems UK Ltd, Chickenhall Lane, Bishopstoke, Hants SO50 6YU, UK

Technical Enquiries +44 (0) 2380 608760 Fax Number +44 (0) 2380 608769

© PRYSMIAN 2008. All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed correct at the time of issue. Prysmian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian.