


FRBU - Mid Size Fibre Joint

Prysmian Part Number: *See below*



Using Small Pon Splice Tray

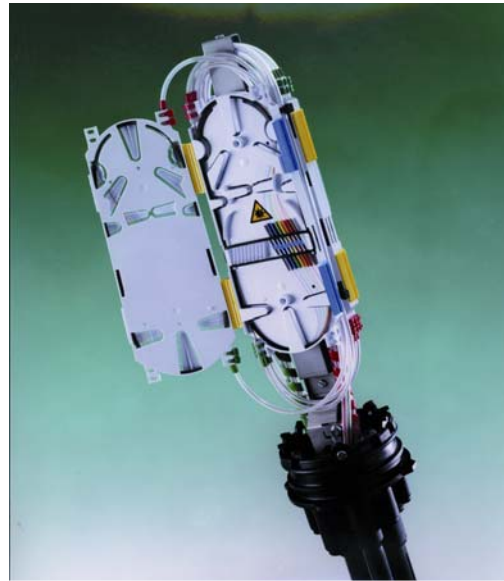

Using Medium Pon Splice Tray

The FRBU Mid Size Fibre Joint is primarily used for local distribution of optical cables / blown fibres in both aerial and underground optical fibre networks. The joint is circular in shape and compact. The base configuration offers 8 round cable ports together with one oval port for loop through applications. The joint cover is fitted with a pressure release valve and has its cap / base sealed with a rolling "O" ring and clamp mechanism. Cable entries can be sealed using either mechanical cable entry kits (Cablelok™) and/or heatshrink sleeves.

Features and Benefits

- The FRBU - Medium Size Fibre Joint has a recommended maximum capacity of 72 fibres (using standard heatshrink splice protectors)
- Compact size enclosures for ease of installation (130mm diameter).
- The joint is compatible with a large range of Prysmian manufactured optical cables including Zephyr™ mini blown cables Rapier® micro-module cables and Sirocco® blown fibre.
- With up to 8 small diameter ports it can be used for the distribution of subscriber drops in FTTH networks.
- Also suitable for low / medium fibre count cables in CATV and trunk networks.

Kit Contents

The FRBU - Medium Size Fibre Joint is supplied with splice trays and all accessories required for the complete installation of two cables.


Additional Items

- Splice Protectors
- Sealing Options
- Wall & Pole Mounting Bracket
- Installation Clamp / Mounting Bracket
- Port Opening Tools
- Cover Release Tool

Technical Data

- Number of cable ports: 8 circular and 1 oval
- Maximum cable diameter (mm): 24 (see below)

| Port Type | No. of ports | Cable Range (mm) | |
|-----------|--------------|------------------|-----------------|
| | | Cablelok™ | Heatshrink |
| L | 1 | 2 x 13.0 - 22.0 | 2 x 12.0 - 24.0 |
| B | 4 | 4.8 - 16.5 | 6.0 - 19.0 |
| R | 4 | 1.7 - 9.5 | 4.0 - 11.0 |



9-Port Base

Refer to Datasheet HT006 for details on Cable Sealing options.

- Maximum number of splice trays: 6
- Maximum fibre capacity of Joint: 72 Using 2.4mm Heat Shrink (96 on Medium PON Splice Tray)
192 Using 4 Fibre Ribbon on a small PON Tray
144 Using Mechanical Crimp
- Required space envelope (mm): (l) 505 / 435 x (Ø) 130
- Operating temperature: -20°C to + 50°C (5 to 95% RH)

Part Numbers

FRBU - Medium Size Fibre Joint

| Part No. | No. of ports | No. of trays | Type of tray | Method of sealing |
|--------------|--------------|--------------|------------------------|--------------------|
| XJHSC00021 | 9 | 6 | Medium Pon Splice Tray | Cablelok™ sealing |
| XJHSC00022 | 9 | 6 | Medium Pon Splice Tray | Heatshrink sealing |
| XJHSC00023 | 9 | 3 | Medium Pon Splice Tray | Cablelok™ sealing |
| XJHSC00024 | 9 | 3 | Medium Pon Splice Tray | Heatshrink sealing |
| XJHSC00037 * | 9 | 6 | Small Pon Splice Tray | Cablelok™ sealing |
| XJHSC00038 * | 9 | 6 | Small Pon Splice Tray | Heatshrink sealing |

* Closure is fitted with fibre loop storage basket

Types of splice protector inserts and maximum splices for trays

| Tray Type | Heat Shrink (2.4mm) with Band | 4-fibre Ribbon | Heat Shrink (1.6mm) | Mechanical Crmp | Universal Mechanical |
|------------------------|-------------------------------|----------------|---------------------|-----------------|----------------------|
| Small Pon Splice Tray | 12 | 48 | 18 | 24 | 8 |
| Medium Pon Splice Tray | 12 | | | 24 | |

| | | | | |
|---------------------|---------------|-----------|-------------------------|---------------|
| Moulded Splice Fins | 3A/PON Insert | 6A Insert | Mechanical Crimp Insert | Ribbon Insert |
|---------------------|---------------|-----------|-------------------------|---------------|

Prysmian Telecom Cables & Systems UK Ltd, Chickenhall Lane, Bishopstoke, Hants SO50 6YU, UK

Technical Enquiries +44 (0) 2380 608760 Fax Number +44 (0) 2380 608769

© PRYSMIAN 2007. All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed correct at the time of issue. Prysmian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian.

Issue 02, June 2007
Ref: HT003

Additional Items

Cable Sealing

The ports of the FRBU – Mid Size Fibre Joint can be sealed using Cablelok™ or heatshrink on all ports. Please see datasheet HT006 for further information.

Prysmian Part No. – see Datasheet HT006



Heat Shrink Splice Protectors

OAsys splice protectors are used to protect the fibre splice. They are 2.4mm in diameter and 45mm in length. There is also a 1.6mm in Diameter and 40mm in length for use with small PON splice tray.

Prysmian Part No. - XPESC00031 (pack of 50) 2.4mm X 45mm
- XHASC00014 (pack of 80) 1.6mm X 40mm



Mechanical (Crimp) Splice Protectors

OAsys Mechanical Splice Protectors are used to protect the fibre splice. They are 45mm in length.

Prysmian Part No. - XKTSC00078 (pack of 50)
- XKTSC00079 (pack of 12)



Mechanical Splice Protectors

OAsys Mechanical Splice Protectors are used to splice fibres together without the need of a fusion splicing machine. They are 4mm wide x 4mm tall and 40mm in length. An assembly tool and splice holder is required for installation. See Prysmian data sheet AC007 for further information on mechanical splices.

Prysmian Part No. - XKTSC00121 (pack of 50)



Wall or Pole Mounting Bracket

The OAsys Joint Wall or Pole Mounting Bracket allows an OAsys FRBU - Mid Size Fibre Joint to be mounted vertically or horizontally on a pole, or against a wall face or bulk head. The bracket is secured using either screws or a steel band (not provided).

Prysmian Part No. – XHASC00077



Installation Clamp / Mounting Bracket

The Universal Installation Mounting Bracket or Clamp is designed for securing the closure in the horizontal or vertical position during installation of network cables or closure maintenance. The standard version will fit a number of closures including the FRBU – Mid Size Joint, the jaws specific to this joint can be purchased separately.

*Prysmian Part Nos. – XHASC00079 (standard)
XHASC00082 (jaws only)*



Port Opening Tools

Port Opening Tools are available in a number of sizes designed for the removal of the ends of closed joint cable entry ports. Two types are used on the FRBU – Mid Size Fibre Joint, depending upon port size (see below). The port opening tools used on this joint are "Top Hat" style. A Coping Saw is required for oval ports.

*Prysmian Part Nos. – XHASC00071 (port size R)
XHASC00072 (port size B)
XHASC00076 (coping saw – port size L)*



Cover Release Tool

The Cover Release Tools are supplied in pairs and are re-usable hand operated tools manufactured from stainless steel. They aid opening of the FRBU – Mid Size Fibre Joint; the tongues of the tools are simply applied between the base and cover and act to lever the cover retaining lugs from the base.

Prysmian Part No. – XHASC00070



Prysmian Telecom Cables & Systems UK Ltd, Chickenhall Lane, Bishopstoke, Hants SO50 6YU, UK

Technical Enquiries +44 (0) 2380 608760 Fax Number +44 (0) 2380 608769

© PRYSMIAN 2007. All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed correct at the time of issue. Prysmian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian.

The FRBU joint is supplied to Prysmian under an OEM agreement by HellermannTyton. Cablelok™ is a HellermannTyton patented product. The Cablelok™ trademark is owned by HellermannTyton. Prysmian are an authorised distributor of these products and the use of the trademark.

Issue 02, June 2007
Ref: HT003